




FIBER OPTIC CABLES



INDOOR

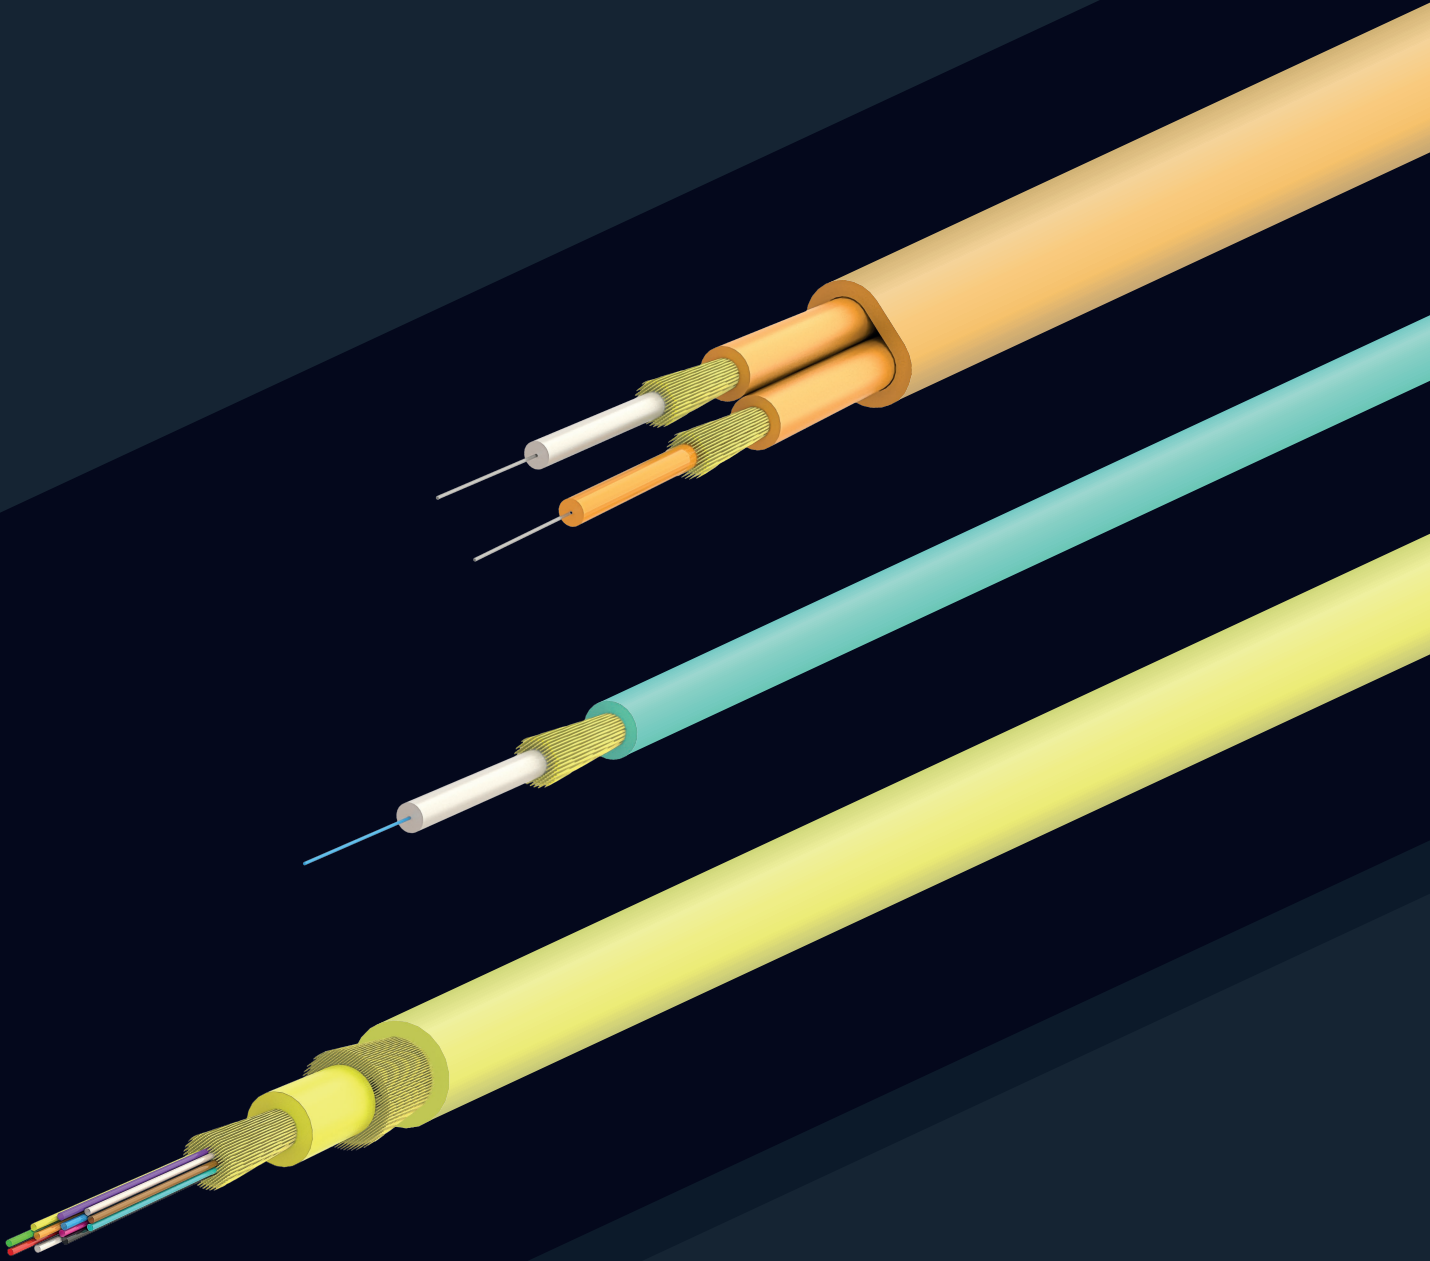

Founded in 2003, SAMM Technology offers cutting-edge products and services in the fields of telecommunication infrastructure and data center by producing in line with the expectations and needs of its customers.

With more than 20 years of experience, SAMM Technology has become one of the important suppliers of Europe in terms of capacity, technology and innovation by continuously investing in production, technology, R&D and people.


SAMM Teknoloji produces high performance fiber optic cables, fiber optic cable assemblies, data center infrastructure products and structured cabling solutions in its two factories located in the Gosb/Gebze industrial zone.

SAMM also has a ministry-approved research and development center since 2017.



20+ Years' Experience

With more than 200 employees and 2 factories, we have achieved several significant projects in telecommunication fiber optic infrastructure.




World Class Production

With systematic and scientific methods, we always focus on reaching the highest quality in our fiber optic cable production and assembly lines.




Connecting Continents

An advantageous shipping location, at the intersection of Asia, Europe and the Middle-East.



Innovative Solutions

We are passionate about responding to customer demand and keeping pace with the ever-evolving telecommunication and fiber optic technologies.

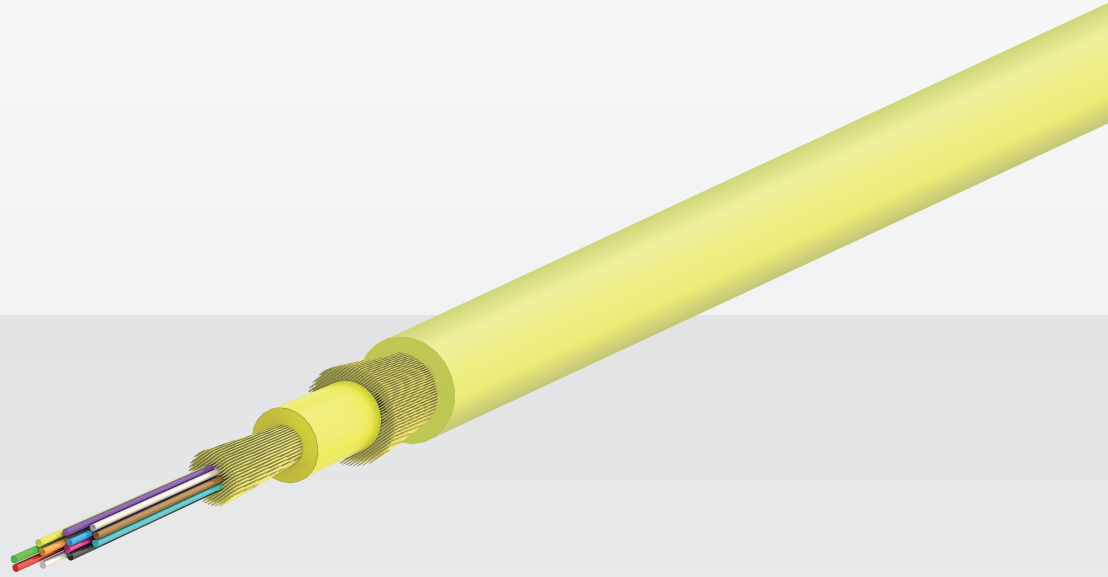

INDOOR FIBER OPTIC CABLES

Single-mode Fiber Specifications

Optical Characteristics of Single-mode Fiber

	Conditions	Unit	E9/125			
			G.652.D	G.657.A1	G.657.A2	G.657.B3
Attenuation typical (in cable)	1310 nm	dB/km	≤ 0.34	≤ 0.35	≤ 0.35	≤ 0.35
	1383 nm	dB/km	≤ 0.34	≤ 0.35	≤ 0.35	≤ 0.35
	1550 nm	dB/km	≤ 0.20	≤ 0.21	≤ 0.21	≤ 0.21
	1625 nm	dB/km	≤ 0.24	≤ 0.23	≤ 0.23	≤ 0.23
Attenuation maximum (in cable)	1310 nm	dB/km	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
	1383 nm	dB/km	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
	1550 nm	dB/km	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25
	1625 nm	dB/km	≤ 0.25	≤ 0.25	≤ 0.25	≤ 0.25
Cable cut-off wavelength λ_{cc}	standard	nm	≤ 1260	≤ 1260	≤ 1260	≤ 1260
Chromatic dispersion	1285 - 1330 nm	ps/nm × km	≤ 3.50	≤ 3.50	≤ 3.50	≤ 3.50
	1550 nm	ps/nm × km	≤ 18	≤ 18	≤ 18	≤ 18
Zero dispersion wavelength λ_0	-	-	1300 - 1324	1300 - 1324	1300 - 1324	1300 - 1324
Zero dispersion slope S0 at λ_0	-	-	≤ 0.092	≤ 0.092	≤ 0.092	≤ 0.092
Polarisation mode dispersion	link value	ps/√km	≤ 0.06	≤ 0.06	≤ 0.06	≤ 0.06
	individual	ps/√km	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Mode-field diameter	1310 nm	μm	8.7 - 9.5	8.4 - 9.2	8.4 - 9.2	8.2 - 9.0
	1550 nm	μm	9.8 - 10.8	9.3 - 10.3	9.3 - 10.3	9.1 - 10.1
Macrobending loss r = 5.0 mm, 1 turn	1550 nm	dB	-	-	-	≤ 0.15
	1625 nm	dB	-	-	-	≤ 0.45
Macrobending loss r = 7.5 mm, 1 turn	1550 nm	dB	-	-	≤ 0.50	≤ 0.08
	1625 nm	dB	-	-	≤ 1.0	≤ 0.25
Macrobending loss r = 10 mm, 1 turn	1550 nm	dB	-	≤ 0.75	≤ 0.1	≤ 0.03
	1625 nm	dB	-	≤ 1.50	≤ 0.2	≤ 0.1
Macrobending loss r = 15 mm, 10 turn	1550 nm	dB	-	≤ 0.25	≤ 0.03	≤ 0.02
	1625 nm	dB	-	≤ 1.00	≤ 0.1	≤ 0.05
Macrobending loss r = 16/30 mm, 1/100 turn	1550 nm	dB	≤ 0.05	-	-	-
	1625 nm	dB	≤ 0.05	-	-	-

Geometrical Characteristics

	Unit	E9/125			
		G.652.D	G.657.A1	G.657.A2	G.657.B3
Cladding diameter	μm	125 ± 0.7	125 ± 0.7		
Coating diameter (uncoloured)	μm	235-250	235-245		
Concentricity error core/cladding	μm	≤ 0.6	≤ 0.5		
Concentricity error cladding/coating	μm	≤ 12.0	≤ 12.0		
Cladding non-circularity	%	≤ 1.0	≤ 0.7		
Coating non-circularity	%	≤ 6.0	≤ 6.0		

Mechanical and Environmental characteristics

	Unit	E9/125			
		G.652.D	G.657.A1	G.657.A2	G.657.B3
Tensile proof test (fiber elongation ≤ 1 %)	N (kpsi)	≥ 9.0 (100)			
Operation temperature range -60 to 85 °C (1310, 1550 and 1625 nm)	Δ dB/km	≤ 0.05			
Water immersion 23 °C for 30 days (1310, 1550 and 1625 nm)	Δ dB/km	≤ 0.05			

Specifications

	E9/125			
	G.652.D	G.657.A1	G.657.A2	G.657.B3
	ITU-T G.652.D IEC 60793-2-50 B-652.D	ITU-T G.657.A1 IEC 60793-2-50 B-657.A1	ITU-T G.657.A2 IEC 60793-2-50 B-657.A2	ITU-T G.657.B3 IEC 60793-2-50 B-657.B3
Standards				

Multi-mode Fiber Specifications

Optical Characteristics of Multi-mode Fiber

	Conditions	Unit	G62.5/125	G50/125				
			OM1	OM2	OM2+	OM3	OM4	OM5
Effective Modal Bandwidth	850 nm	MHz × km	N/A	N/A	950	2000	4700	4700
Overfilled Modal Bandwidth	850 nm	MHz × km	200	500	700	1500	3500	3500
	1300 nm	MHz × km	500	500	500	500	500	500
1000BASE-SR	850 nm	m	275	500	750	1000	1100	N/S
10GBASE-SR	850 nm	m	N/S	83	150	300	550	N/S
40GBASE-SR4 / 100GBASE-SR10	850 nm	m	N/A	N/A	N/A	140	170	200
Bending loss at 850/1300 nm	r= 37.5 mm	dB	0.5/0.5	0.1/0.2				
	r= 15.0 mm	dB	-	0.1/0.3				
	r= 7.5 mm	dB	-	0.2/0.5				
Attenuation typical (in cable)	850 nm	dB/km	2.6	2.3				
	1300 nm	dB/km	0.5	0.5				
Attenuation maximum (in cable)	850 nm	dB/km	≤ 3	≤ 2.7				
	1300 nm	dB/km	≤ 1.0	≤ 1.0				
Numerical aperture	-	-	0.275±0.015	0.200 ± 0.015				

Geometrical Characteristics

	Unit	G62.5/125	G50/125				
		OM1	OM2	OM2+	OM3	OM4	OM5
Core diameter	µm	62.5 ± 2.5	50 ± 2.5				
Cladding diameter	µm	125 ± 1	125 ± 1				
Coating diameter	µm	245 ± 7	242 ± 7				
Concentricity error core/cladding	µm	≤ 1.5	≤ 1.0				
Core non-circularity	µm	≤ 5.0	≤ 5.0				
Cladding non-circularity	%	≤ 1.0	≤ 1.0				
Coating non-circularity	%	≤ 6.0	≤ 6.0				

Mechanical and Environmental Characteristics

	Unit	G62.5/125	G50/125				
		OM1	OM2	OM2+	OM3	OM4	OM5
Coating strip force (Typical/Peak)	N	1.0 to 3.0 / 1.3 to 8.9					
Tensile proof test at fiber elongation ≤ 1 %	N (kpsi)	≥ 9.0 (100)					
Temperature range max. Δ 0.1 dB/km 850/1300 nm	°C	-60 to +85					
Water immersion max. Δ 0.2 dB/km 850/1300 nm	-	23 °C more than 30 days					

Specifications

Standards	G62.5/125	G50/125				
	OM1	OM2	OM2+	OM3	OM4	OM5
	IEC 60793-2-10 A1-OM1	IEC 60793-2-10 (ITU-T G.651.1) A1-OM2b A1-OM2b A1-OM3b A1-OM4b A1-OM5b				

Fiber Optic Color Coding

Fiber Color Coding

ANSI/TIA-598 (Samm Standard)

Number	1	2	3	4	5	6	7	8	9	10	11	12
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Violet	Pink	Aqua

DIN VDE V 0888-100-1-1

Number	1	2	3	4	5	6	7	8	9	10	11	12
Color	Red	Green	Blue	Yellow	White	Gray	Brown	Violet	Aqua	Black	Orange	Pink

IEC 60794-2

Number	1	2	3	4	5	6	7	8	9	10	11	12
Color	Blue	Yellow	Red	White	Green	Violet	Orange	Gray	Aqua	Black	Brown	Pink

Note: If the color sequence is repeated for fibers 13-24, the fibers are marked with black stripes or dashes.

Tube Color Coding

ANSI/TIA-598 (Samm Standard)

Number	1	2	3	4	5	6	7	8	9	10	11	12
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Violet	Pink	Aqua

Notes:

- If the color sequence is repeated for fibers 13-24, the fibers are marked with black stripes or dashes.
- If loose tubes are divided into layers, the tube colors restart from 1 for each layer.

Color Abbrivation According to IEC-60757

Abb.	BU	OG	GN	BN	GY	WH	RD	BK	YE	VT	PK	AQ
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Violet	Pink	Aqua

Standard Jacket Colors

Abb.	OG	GY	WH	BK	YE	VT	AQ	LG
Color	Orange	Gray	White	Black	Yellow	Violet	Aqua	Lime Green

Fiber Optic Cable Design Coding Guide

Design Number = **A₁** **B₁** **C₁** **D₁** **E₁**

Desing Number Example: 30121901

Design Code = **A₂** - **B₂** **C₂** **D₂** - **E₂**

Desing Code Example: A-D1Q(ZN-GY)(SR)2Y-1D250


A ₁	A ₂	Description
1	I	Indoor
2	U	Indoor&Outdoor
3	A	Outdoor
4	IT	Indoor Breakout / Multi Tube
5	UT	Indoor&Outdoor Breakout / Multi Tube
6	AT	Outdoor Breakout / Multi Tube

B ₂	B ₁	Description
00		No Tube
01	D1	Gel-Filled Loose Tube-PBT
02	D2	Gel-Filled Loose Tube-PC+PBT
03	D3	Gel-Filled Loose Tube-PA
04	D4	Gel-Filled Loose Tube-LSZH
05	D5	Gel-Filled Loose Tube-PBT-FR
06	B1	Gel-Free Loose Tube-LSZH
07	B2	Gel-Free Loose Tube-PP
08	B3	Gel-Free Loose Tube-LSZH (with Aramid)
09	B4	Gel-Free Loose Flex-LSZH
10	VS9	Semi-Tight Buffer 900 mic LSZH
11	VT6	Tight Buffer 600 mic LSZH
12	VT9	Tight Buffer 900 mic LSZH
13	WS9	Semi-Tight Buffer 900 mic TPE-E
14	WT6	Tight Buffer 600 mic TPE-E
15	WT9	Tight Buffer 900 mic TPE-E
16	PS9	Semi-Tight Buffer 900 mic PA
17	PT6	Tight Buffer 600 mic PA
18	PT9	Tight Buffer 900 mic PA

C ₁	C ₂	Description
0		Non-Loose Tbe
1	F	Gel-Filled Core
2	Q	Dry Core

E ₁	E ₂	Description
00		Non-Loose-Tube
01	1D250	1 Gel-filled Loose Tube 2.5 mm
02	1D300	1 Gel-filled Loose Tube 3.0 mm
03	6D200	6 Gel-filled Loose Tube 2.0 mm
04	8D200	8 Gel-filled Loose Tube 2.0 mm
05	12D200	12 Gel-filled Loose Tube 2.0 mm
06	18D200	18 Gel-filled Loose Tube 2.0 mm
07	18D280	18 Gel-filled Loose Tube 2.8 mm
08	24D200	24 Gel-filled Loose Tube 2.0 mm
09	6D170	6 Gel-filled Loose Tube 1.7 mm
10	8D170	8 Gel-filled Loose Tube 1.7 mm
11	12D170	12 Gel-filled Loose Tube 1.7 mm
12	24D170	24 Gel-filled Loose Tube 1.7 mm
13	6D140	6 Gel-filled Loose Tube 1.4 mm
14	8D140	8 Gel-filled Loose Tube 1.4 mm
15	12D140	12 Gel-filled Loose Tube 1.4 mm
16	24D140	24 Gel-filled Loose Tube 1.4 mm
17	24D190	24 Gel-filled Loose Tube 1.9 mm
18	1B250	1 Gel-free Loose Tube 2.5 mm
19	1B300	1 Gel-free Loose Tube 3.0 mm
20	4B200	4 Gel-free Loose Tube 2.0 mm
21	6B200	6 Gel-free Loose Tube 2.0 mm
22	6B250	6 Gel-free Loose Tube 2.5 mm
23	1S200	1 Steel Spiral Tube 2.0 mm
24	1S290	1 Steel Spiral Tube 2.9 mm
25	2U200	2 Simplex Tube 2.0 mm
26	4U200	4 Simplex Tube 2.0 mm
27	6U200	6 Simplex Tube 2.0 mm
28	8U200	8 Simplex Tube 2.0 mm
29	10U200	10 Simplex Tube 2.0 mm
30	12U200	12 Simplex Tube 2.0 mm
31	16U200	16 Simplex Tube 2.0 mm
32	18U200	18 Simplex Tube 2.0 mm
33	20U200	20 Simplex Tube 2.0 mm
34	24U200	24 Simplex Tube 2.0 mm
35	5B200	5 Gel-free Loose Tube 2.0 mm
36	4B250	4 Gel-free Loose Tube 2.5 mm
37	1U060	1 Tight Tube 0.6 mm
38	2U060	2 Tight Tube 0.6 mm
39	1U090	1 Tight Tube 0.9 mm
40	2U090	2 Tight Tube 0.9 mm
41	4U090	4 Tight Tube 0.9 mm
42	6U090	6 Tight Tube 0.9 mm
43	8U090	8 Tight Tube 0.9 mm
44	12U090	12 Tight Tube 0.9 mm
45	16U090	16 Tight Tube 0.9 mm
46	18U090	18 Tight Tube 0.9 mm
47	20U090	20 Tight Tube 0.9 mm
48	22U090	22 Tight Tube 0.9 mm
49	24U090	24 Tight Tube 0.9 mm
50	6D230	6 Gel-filled Loose Tube 2.3 mm
51	8D230	8 Gel-filled Loose Tube 2.3 mm
52	6D250	6 Gel-filled Loose Tube 2.3 mm
53	8D250	8 Gel-filled Loose Tube 2.3 mm
54	1B090	1 Flex tube 0.9 mm
55	1B105	1 Flex tube 1.05 mm
56	1B110	1 Flex tube 1.10 mm
57	5B300	5 Gel-free Loose Tube 3.0 mm
58	6B300	6 Gel-free Loose Tube 3.0 mm
59	12B300	12 Gel-free Loose Tube 3.0 mm
60	8U400	8 MTBO LSZH Tube
61	8B300	8 Gel-free Loose Tube 3.0 mm
62	X	No Tube
63	4B300	4 Gel-free Loose Tube 3.0 mm

Fiber Optic Cable Order Coding Guide

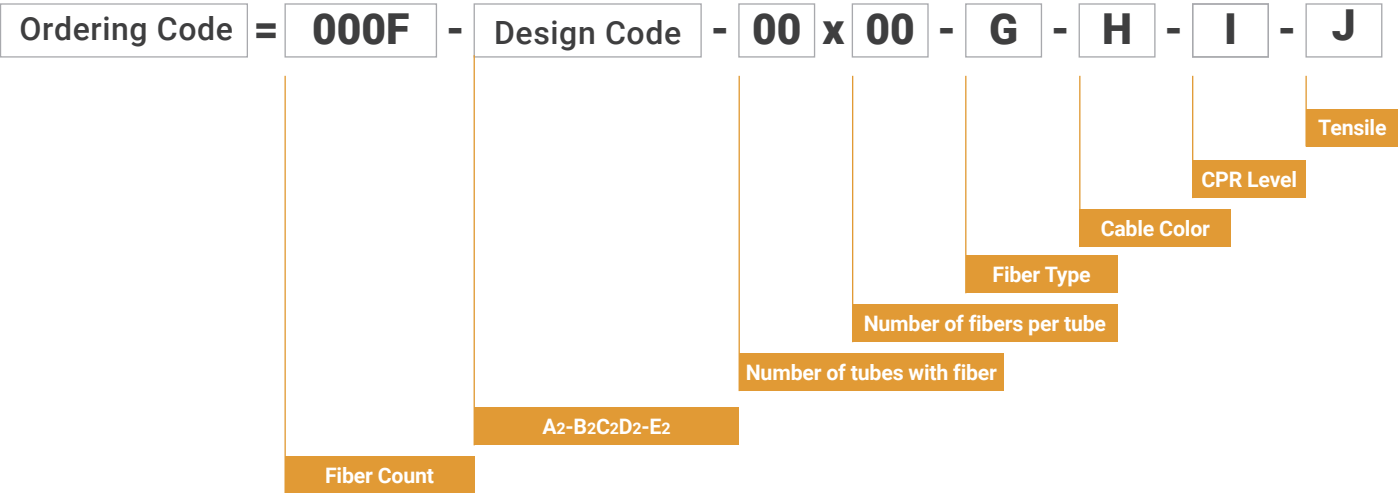

Ordering Code Example: 012F-A-D1Q(ZN-GY)(SR)2Y-1D250-1x12-2D-BK-Fca-1.2kN

D ₁	D ₂	Description
00		
01	Y	PVC sheath
02	H	LSZH sheath
03	2Y	PE sheath
04	4Y	PA sheath
05	11Y	PUR sheath
06	(L)2Y	Aluminium multi-layer under PE sheath
07	(SR)2Y	Corrugated steel tape reinforcement under PE sheath
08	(SR)H	Corrugated steel tape reinforcement under LSZH sheath
09	(ZN-AY)2Y	Aramid yarn under PE sheath
10	(ZN-GY)2Y	Glass yarn under PE sheath
11	(ZN-AY)H	Aramid yarn under LSZH sheath
12	(ZN-GY)H	Glass yarn under LSZH sheath
13	(ZM)H	Metallic strain relief element under LSZH sheath
14		
15	(ZN-GY)B2Y	Glass yarn and rodent protection under PE sheath
16	(ZN-AY)H	Aramid yarn and rodent protection under LSZH sheath
17	(ZN-GY)BH	Glass yarn and rodent protection under LSZH sheath
18	(ZN-AY)(SR)2Y	Aramid yarn and corrugated steel tape under PE sheath
19	(ZN-GY)(SR)2Y	Glass yarn and corrugated steel tape under PE sheath
20	(ZN-AY)(SR)H	Aramid yarn and corrugated steel tape under LSZH sheath
21	(ZN-GY)(SR)H	Glass yarn and corrugated steel tape under LSZH sheath
22	-SH	Steel wire for aerial application
23	(ZN-2S)H	Steel strength member under LSZH sheath
24	(ZN-2S)HT	Steel strength member+steel messenger under LSZH sheath
25	(ZN-2P)H	FRP strength member under LSZH sheath
26	(ZN-2P)HT	FRP strength member+steel messenger under LSZH sheath
27	(ZN-AY)HH	Aramid yarn under double LSZH sheath
28	(ZN-GY)HH	Glass yarn under double LSZH sheath
29	(ZN-AY)H(ZN-AY)H	Aramid yarn under LSZH sheath, under, aramid yarn under LSZH sheath
30	(ZN-AY)H(ZN-GY)H	Aramid yarn under LSZH sheath, under, glass yarn under LSZH sheath
31	(ZN-GY)H(ZN-GY)H	Glass yarn under LSZH sheath, under, glass yarn under LSZH sheath
32	(ZN-GY)2Y(SR)2Y	Glass yarn under PE sheath, under, corrugated steel tape under PE sheath
33	(ZN-GY)2YT	Glass yarn under PE sheath with Steel Messenger
34	(ZN-GY)(SR)2YT	Glass yarn and corrugated steel tape under PE sheath with Steel Messenger
35	2Y(ZN-AY)2Y	PE sheath, under, aramid yarn under PE sheath
36	(ZN-AY)H(ZN-GY)BH	Aramid yarn under LSZH sheath, under, glass yarn and rodent protection under LSZH sheath
37	(ZN-AY)H(ZN-GY)H (ZN-GY)BH	Aramid yarn under LSZH sheath, under, glass yarn under LSZH sheath, under, glass yarn and rodent protection under LSZH sheath
38	(ZN-AY)11Y	Aramid yarn under PUR sheath
39	(ST)(ZN-AY)H	Steel Spiral Tube and aramid yarn under LSZH sheath
40	(ST)(SB)H	Steel Spiral tube and Steel braiding under LSZH sheath
41	(ZN-AY)H(ZN-GY)H	Aramid yarn under LSZH sheath, under, glass yarn under LSZH sheath
42	2Y(ZN-AY)2Y+ATR	PE sheath, under, aramid yarn, under anti track resistance PE sheath
43	(ZN-AY)2Y+ATR	Aramid yarn, under anti track resistance PE sheath

G	Fiber Type
2D	Single Mode G652.D
A1	Single Mode G657.A1
A2	Single Mode G657.A2
B3	Single Mode G657.B3
5D	Single Mode G655.D
M1	Multi Mode G651.OM1
M2	Multi Mode G651.OM2
M3	Multi Mode G651.OM3
M4	Multi Mode G651.OM4
M5	Multi Mode G651.OM5


H	Cable Color
BK	Black
YE	Yellow
OG	Orange
AQ	Aqua
VT	Violet
WH	White
IV	Ivory
BU	Blue
LG	Lime Green

I	CPR Level
	B2ca
	Cca
	Dca
	Eca
	Fca

J	Tensile
	kN

Buffered Optical Fibers

A buffer is one type of component used to encapsulate optical fibers for the purpose of providing such functions as mechanical isolation, protection from physical damage and fiber identification.

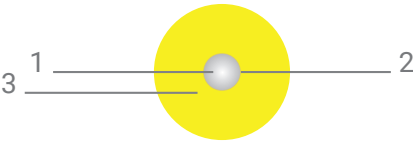

Cable Construction

1	Outer buffer tube	600/900 μm
2	Colored coating on fiber	250 μm
3	Optical fiber with cladding	125 μm

Properties

Metal-free indoor cable
For direct connector assembly
Halogen-free and non-corrosive fire gases
For high mechanical and thermal stability
Improved crush resistance

Applications

Data cable in distribution networks
Installation in indoor area
Patch cable within distribution frames and termination boxes
In thermally and mechanically critical environments
For mobile or flexible systems

Type Codes for Buffer Tubes

VS9	Semi-Tight Buffer 900 mic LSZH
VT6	Tight Buffer 600 mic LSZH
VT9	Tight Buffer 900 mic LSZH
VE9	Easy Strip Buffer 900 mic LSZH
WS9	Semi-Tight Buffer 900 mic TPE-E
WT6	Tight Buffer 600 mic TPE-E
WT9	Tight Buffer 900 mic TPE-E
PS9	Semi-Tight Buffer 900 mic PA
PT6	Tight Buffer 600 mic PA
PT9	Tight Buffer 900 mic PA

Technical Specification

Tube Construction	Conditions	Unit	VT9	VT6	VS9	VE9	Standard
Tube Outer Diameter	-	mm	0.9	0.6	0.9	0.9	-
Tube Material	-	-	LSZH	LSZH	LSZH	LSZH	-
Stripping Length	-	mm	20-30	20-30	300-500	1000-1500	-
Tensile Strength	During Installation	N	20	20	20	20	IEC 60794-1-21 E1
	In service	N	10	10	10	10	
Crush Resistance	Short-term	N/dm	1000	500	1000	100	IEC 60794-1-21 E3
	Long-term	N/dm	500	250	500	500	
Approx. Weight	-	kg/km	0.8	0.45	0.8	0.8	-
Temperature Range	During Installation	°C	-5 to +50 °C				IEC 60794-1-22 F12
	In service	°C	-25 to +60 °C				
	In storage	°C	-40 to +60 °C				

Standard Ordering Codes

Generic Product Coding	Generic Product Description
001F-I-...-2D-NT/BU	... µm, LSZH, Buffered Cable, 1 Fiber, G.652.D, Fiber: Natural / Buffer: Blue
001F-I-...-2D-BU/BU	... µm, LSZH, Buffered Cable, 1 Fiber, G.652.D, Fiber: Blue / Buffer: Blue
001F-I-...-A1-NT/WH	... µm, LSZH, Buffered Cable, 1 Fiber, G.657.A1, Fiber: Natural / Buffer: White
001F-I-...-A1-WH/WH	... µm, LSZH, Buffered Cable, 1 Fiber, G.657.A1, Fiber: White / Buffer: White
001F-I-...-A2-NT/YE	... µm, LSZH, Buffered Cable, 1 Fiber, G.657.A2, Fiber: Natural / Buffer: Yellow
001F-I-...-A2-YE/YE	... µm, LSZH, Buffered Cable, 1 Fiber, G.657.A2, Fiber: Yellow/ Buffer: Yellow
001F-I-...-M1-NT/GY	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM1, Fiber: Natural / Buffer: Gray
001F-I-...-M1-GY/GY	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM1, Fiber: Gray / Buffer: Gray
001F-I-...-M2-NT/OG	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM2, Fiber: Natural / Buffer: Orange
001F-I-...-M2-OG/OG	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM2, Fiber: Orange / Buffer: Orange
001F-I-...-M3-NT/AQ	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM3, Fiber: Natural / Buffer: Aqua
001F-I-...-M3-AQ/AQ	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM3, Fiber: Aqua / Buffer: Aqua
001F-I-...-M4-NT/VT	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM4, Fiber: Natural / Buffer: Heater Violet
001F-I-...-M4-VT/VT	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM4, Fiber: Heater Violet / Buffer: Heater Violet
001F-I-...-M5-NT/LG	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM5, Fiber: Natural / Buffer: Lime Green
001F-I-...-M5-LG/LG	... µm, LSZH, Buffered Cable, 1 Fiber, G.651.OM5, Fiber: Lime Green / Buffer: Lime Green

* Please define your buffer tube type, fiber and tube color when ordering.

* Sample Code and Description:
001F-I-VS9-M5-NT/LG 900µm, LSZH, Semi Tight Buffered Cable, 1 Fiber, G.651.OM5, Fiber: Natural / Buffer: Lime Green

Standard Fiber and Jacket Colors

Fiber Type	2D	A1	A2	OM1	OM2	OM3	OM4	OM5
Jacket Color	Blue	White	Yellow	Gray	Orange	Aqua	Violet	Lime Green

* Other colors are available upon request, according to ANSI/TIA-598.


Color Abbrivation According to IEC-60757

Abb.	BU	OG	GN	BN	GY	WH	RD	BK	YE	VT	PK	AQ	NT
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Violet	Pink	Aqua	Natural

Simplex Fiber Cable

Design Type I-VT6(ZN-AY)H / I-VT9(ZN-AY)H

Standards: IEC 60794-1 / IEC 60794-2 / IEC 60793-1

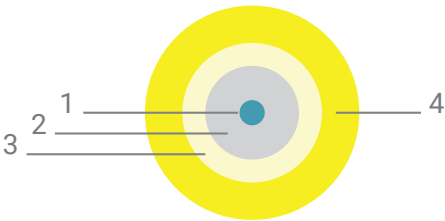

Properties

Metal free indoor cable with completely dry design
Designed for direct connector assembly
High flexibility and light weight
Halogen free and non-corrosive fire gases
LSZH flame retardant and self-extinguishing jacket material

Cable Construction

1	Fiber	SM or MM (250 μ)
2	Buffer Tube	900μ LSZH
3	Strength Member	Aramid yarn
4	Outer Jacket	LSZH - FR

Identification

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value (According to Jacket Diameter)			
			1.8 mm	2.0 mm	2.4 mm	2.7 mm
Tensile Force	Installation	IEC 60794-1-21-E1	200 N	200 N	400 N	400 N
	In Service		100 N	100 N	200 N	200 N
Crush Resistance	Installation	IEC 60794-1-21-E3	1000 N / 10 cm			
	-					
Impact	-	IEC 60794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts			
Repeated Bending	-	IEC 60794-1-21-E6	R= 20 x D, 25 cycles, 40 N			
Torsion	-	IEC 60794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N			
Cable Bending	-	IEC 60794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles			

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	Dca

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
11101137	001F-I-VT6(ZN-AY)H-1U060-1x1-...-Dca-0.2kN 1.8	1	1	0.6	1.8	3.5
11201139	001F-I-VT9(ZN-AY)H-1U090-1x1-...-Dca-0.2kN 2.0	1	1	0.9	2.0	4.1
11201139	001F-I-VT9(ZN-AY)H-1U090-1x1-...-Dca-0.4kN 2.4	1	1	0.9	2.4	6.0
11201139	001F-I-VT9(ZN-AY)H-1U090-1x1-...-Dca-0.4kN 2.7	1	1	0.9	2.7	7.4
11001139	001F-I-VS9(ZN-AY)H-1U090-1x1-...-Dca-0.2kN 2.0	1	1	0.9	2.0	4.1
11001139	001F-I-VS9(ZN-AY)H-1U090-1x1-...-Dca-0.4kN 2.4	1	1	0.9	2.4	6.0
11001139	001F-I-VS9(ZN-AY)H-1U090-1x1-...-Dca-0.4kN 2.7	1	1	0.9	2.7	7.4



* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 001F-I-VT9(ZN-AY)H-1U090-1x1-A2-YE-Dca-0.2kN 2.0

Drop Fiber Cable - 2.7 mm

Design Type I-VS9(ZN-AY)H

Standards: IEC 60794-1 / IEC 60794-2 / IEC 60793-1

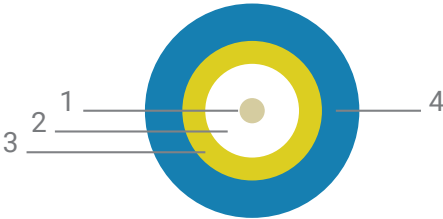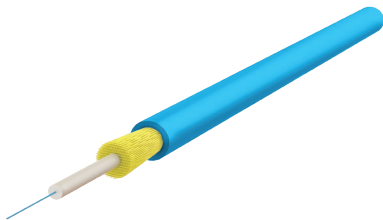

Properties

Metal free indoor cable with completely dry design
Designed for direct connector assembly
High flexibility and light weight
Halogen free and non-corrosive fire gases
LSZH flame retardant and self-extinguishing jacket material

Cable Construction

1	Fiber	SM or MM (250 μ)
2	Semi-tight Buffer Tube	900μ LSZH
3	Strength Member	Aramid yarn
4	Outer Jacket	LSZH - FR

Identification

Print Color/Method	White / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value
Tensile Force	Installation	IEC 60794-1-21-E1	400 N
	In Service		200 N
Crush Resistance	Installation	IEC 60794-1-21-E3	1000 N / 10 cm
	-		
Impact	-	IEC 60794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts
Repeated Bending	-	IEC 60794-1-21-E6	R= 20 x D, 25 cycles, 40 N
Torsion	-	IEC 60794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N
Cable Bending	-	IEC 60794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	B2ca-s1a, d0, a1

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
11001139	001F-I-VS9(ZN-AY)H-1U090-1x1-...-B2ca-0.4kN	1	1	0.9	2.7	8.3



* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 001F-I-VS9(ZN-AY)H-1U090-1x1-B3-BU-B2ca-0.4kN

Duplex Fig-8 Fiber Cable 2x1

Design Type I-VT9(ZN-AY)H

Standards: IEC 60794-1 / IEC 60794-2 / IEC 60793-1

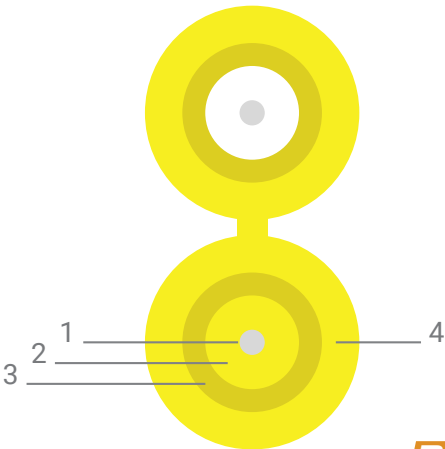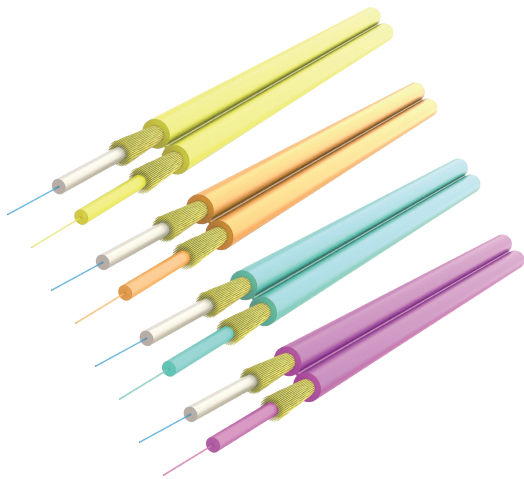

Properties

Metal free indoor cable with completely dry design
Designed for direct connector assembly
High flexibility and light weight
Halogen free and non-corrosive fire gases
LSZH flame retardant and self-extinguishing jacket material

Cable Construction

1	Fiber	SM or MM (250 μ)
2	Buffer Tube	900μ LSZH
3	Strength Member	Aramid yarn
4	Outer Jacket	LSZH - FR

Identification

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value
Tensile Force	Installation	IEC 60794-1-21-E1	400 N
	In Service		200 N
Crush Resistance	Installation	IEC 60794-1-21-E3	1000 N / 10 cm
Impact	-	IEC 60794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts
Repeated Bending	-	IEC 60794-1-21-E6	R= 20 x D, 25 cycles, 40 N
Torsion	-	IEC 60794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N
Cable Bending	-	IEC 60794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	Dca

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
11201140	002F-I-VT9(ZN-AY)H-2U090-2x1-...-Dca-0.4kN 2.0x4.1	2	2	0.9	2.0 x 4.1	9.0
11001140	002F-I-VS9(ZN-AY)H-2U090-2x1-...-Dca-0.4kN 2.0x4.1	2	2	0.9	2.0 x 4.1	9.0



* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 002F-I-VT9(ZN-AY)H-2U090-2x1-A2-YE-Dca-0.4kN 2.0x4.1

Duplex Fig-8 Fiber Cable 2x1

Design Type I-VT6(ZN-AY)H

Standards: IEC 60794-1 / IEC 60794-2 / IEC 60793-1

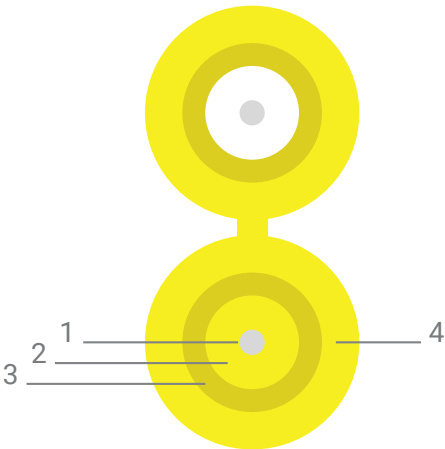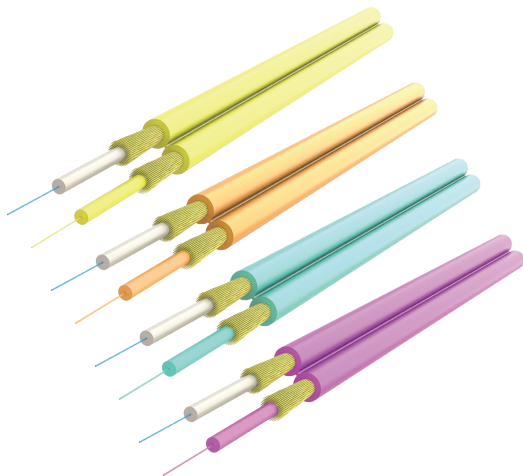

Properties

Metal free indoor cable with completely dry design
Designed for direct connector assembly
High flexibility and light weight
Halogen free and non-corrosive fire gases
LSZH flame retardant and self-extinguishing jacket material

Cable Construction

1	Fiber	SM or MM (250 μ)
2	Buffer Tube	600μ LSZH
3	Strength Member	Aramid yarn
4	Outer Jacket	LSZH - FR

Identification

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value
Tensile Force	Installation	IEC 60794-1-21-E1	300 N
	In Service		100 N
Crush Resistance	Installation	IEC 60794-1-21-E3	1000 N / 10 cm
Impact	-	IEC 60794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts
Repeated Bending	-	IEC 60794-1-21-E6	R= 20 x D, 25 cycles, 40 N
Torsion	-	IEC 60794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N
Cable Bending	-	IEC 60794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	Eca

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
11101138	002F-I-VT6(ZN-AY)H-2U060-2x1-...-Eca-0.3kN 1.6x3.3	2	2	0.6	1.6 x 3.3	5.0
11101138	002F-I-VT6(ZN-AY)H-2U060-2x1-...-Dca-0.4kN 1.8x3.7	2	2	0.6	1.8 x 3.7	6.6



* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 002F-I-VT6(ZN-AY)H-2U060-2x1-A2-YE-Dca-0.4kN 1.8x3.7

Duplex Fig-0 Fiber Cable 2x1

Design Type I-VT9(ZN-AY)HH

Standards: IEC 60794-1 / IEC 60794-2 / IEC 60793-1

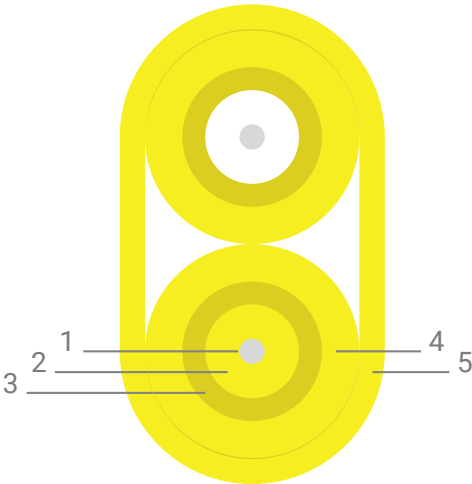

Properties

Metal free indoor cable with completely dry design
Designed for direct connector assembly
High flexibility and light weight
Halogen free and non-corrosive fire gases
LSZH flame retardant and self-extinguishing jacket material

Cable Construction

1	Fiber	SM or MM (250 μ)
2	Buffer Tube	900μ LSZH
3	Strength Member	Aramid yarn
4	Inner Jacket	LSZH - FR
5	Outer Jacket	LSZH - FR

Identification

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value
Tensile Force	Installation	IEC 60794-1-21-E1	400 N
	In Service		200 N
Crush Resistance	Installation	IEC 60794-1-21-E3	1000 N / 10 cm
Impact	-	IEC 60794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts
Repeated Bending	-	IEC 60794-1-21-E6	R= 20 x D, 25 cycles, 40 N
Torsion	-	IEC 60794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N
Cable Bending	-	IEC 60794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	Eca

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
11202740	002F-I-VT9(ZN-AY)HH-2U090-2x1-...-Eca-0.4kN 3.1x5.2	2	2	0.9	3.1 x 5.2	18
11002740	002F-I-VS9(ZN-AY)HH-2U090-2x1-...-Eca-0.4kN 3.1x5.2	2	2	0.9	3.1 x 5.2	18




* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 002F-I-VT9(ZN-AY)HH-2U090-2x1-A2-YE-Eca-0.4kN 3.1x5.2

Duplex Round Fiber Cable 1x2

Design Type I-VT6(ZN-AY)H

Standards: IEC 60794-1 / IEC 60794-2 / IEC 60793-1

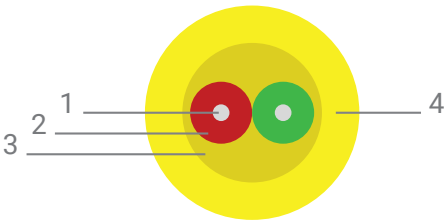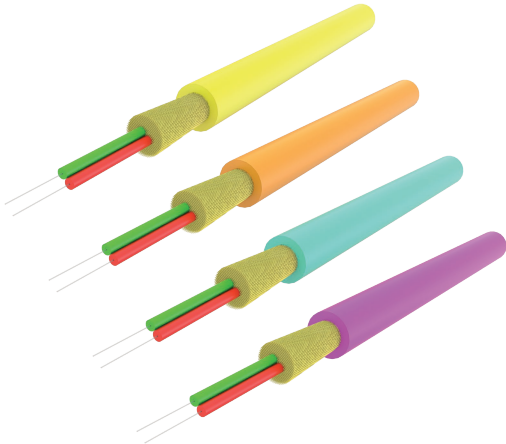

Properties

Metal free indoor cable with completely dry design
Designed for direct connector assembly
High flexibility and light weight
Halogen free and non-corrosive fire gases
LSZH flame retardant and self-extinguishing jacket material

Cable Construction

1	Fiber	SM or MM (250 μ)
2	Buffer Tube	600μ LSZH
3	Strength Member	Aramid yarn
4	Outer Jacket	LSZH - FR

Identification

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value
Tensile Force	Installation	IEC 60794-1-21-E1	300 N
	In Service		150 N
Crush Resistance	Installation	IEC 60794-1-21-E3	1000 N / 10 cm
Impact	-	IEC 60794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts
Repeated Bending	-	IEC 60794-1-21-E6	R= 20 x D, 25 cycles, 40 N
Torsion	-	IEC 60794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N
Cable Bending	-	IEC 60794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	Eca

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
11101138	002F-I-VT6(ZN-AY)H-2U060-1x2-...-...-Eca-0.3kN 2.1	2	2	0.6	2.1	4.3



* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 002F-I-VT6(ZN-AY)H-2U060-1x2-A2-YE-Eca-0.3kN 2.1

Distribution Cable

Design Type I-B3

Standards: IEC 60794-1 / IEC 60794-2 / IEC 60793-1

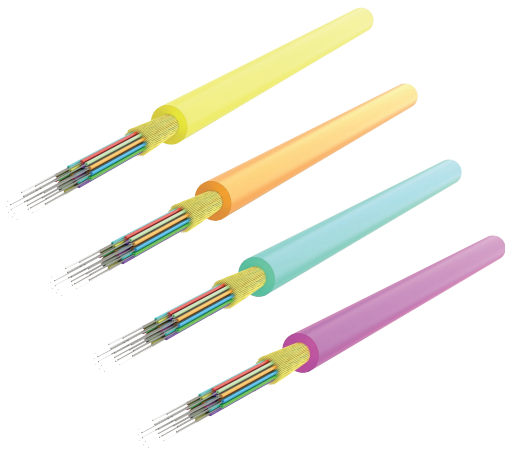

Properties

Metal free indoor cable with completely dry design
Designed for direct connector assembly
High flexibility and light weight
Halogen free and non-corrosive fire gases
LSZH flame retardant and self-extinguishing jacket material

Cable Construction

1	Fiber	SM or MM (250 µ)
2	Strength Member	Aramid yarn
3	Outer Jacket	LSZH - FR

Identification

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value
Tensile Force	Installation	IEC 60794-1-21-E1	200 N
	In Service		100 N
Crush Resistance	Installation	IEC 60794-1-21-E3	1000 N / 10 cm
Impact	-	IEC 60794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts
Repeated Bending	-	IEC 60794-1-21-E6	R= 20 x D, 25 cycles, 40 N
Torsion	-	IEC 60794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N
Cable Bending	-	IEC 60794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	Dca, s2, d0, a1 (DOP-20003) B2ca-s1a, d1, a1 (DOP-20026)

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
10800019	004F-I-B3-1B300-1x4-...-Dca-0.2kN 3.0	4	-	-	3.0	8
10800019	008F-I-B3-1B300-1x8-...-Dca-0.2kN 3.0	8	-	-	3.0	8
10800019	012F-I-B3-1B300-1x12-...-Dca-0.2kN 3.0	12	-	-	3.0	8
10800019	024F-I-B3-1B300-1x24-...-Dca-0.2kN 3.0	24	-	-	3.0	8
10800019	004F-I-B3-1B300-1x4-...-B2ca-0.2kN 3.0	4	-	-	3.0	8
10800019	008F-I-B3-1B300-1x8-...-B2ca-0.2kN 3.0	8	-	-	3.0	8
10800019	012F-I-B3-1B300-1x12-...-B2ca-0.2kN 3.0	12	-	-	3.0	8
10800019	024F-I-B3-1B300-1x24-...-B2ca-0.2kN 3.0	24	-	-	3.0	8



* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 024F-I-B3-1B300-1x24-M4-VT-B2ca-0.2kN 3.0

Ruggedized Distribution Cable

Design Type I-B3Q(ZN-AY)H

Standards: IEC 60794-1 / IEC 60794-2 / IEC 60793-1

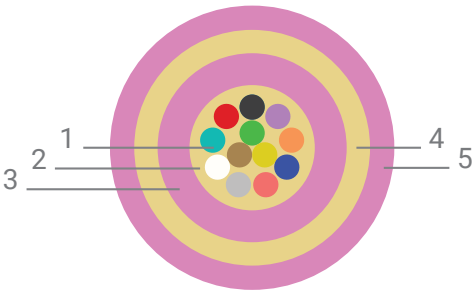

Properties

Metal free indoor cable with completely dry design
Designed for direct connector assembly
High flexibility and light weight
Halogen free and non-corrosive fire gases
LSZH flame retardant and self-extinguishing jacket material

Cable Construction

1	Fiber	SM or MM (250 μ)
2	Strength Member	Aramid yarn
3	Inner Jacket	LSZH - FR
4	Strength Member	Aramid yarn
5	Outer Jacket	LSZH - FR

Identification

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value
Tensile Force	Installation	IEC 60794-1-21-E1	500 N
	In Service		300 N
Crush Resistance	Installation	IEC 60794-1-21-E3	1000 N / 10 cm
Impact	-	IEC 60794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts
Repeated Bending	-	IEC 60794-1-21-E6	R= 20 x D, 25 cycles, 40 N
Torsion	-	IEC 60794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N
Cable Bending	-	IEC 60794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	Eca

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
10821119	004F-I-B3Q(ZN-AY)H-1B300-1x4-...-Eca-0.5kN 4.8	4	1	3.0	4.8	23
10821119	008F-I-B3Q(ZN-AY)H-1B300-1x8-...-Eca-0.5kN 4.8	8	1	3.0	4.8	23
10821119	012F-I-B3Q(ZN-AY)H-1B300-1x12-...-Eca-0.5kN 4.8	12	1	3.0	4.8	23
10821119	024F-I-B3Q(ZN-AY)H-1B300-1x24-...-Eca-0.5kN 4.8	24	1	3.0	4.8	23



* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 024F-I-B3Q(ZN-AY)H-1B300-1x24-M4-VT-Eca-0.5kN 4.8

Mini Breakout Cable

Design Type IT-VT9(ZN-AY)H

Standards: IEC 60794-1 / IEC 60794-3 / IEC 60793-1

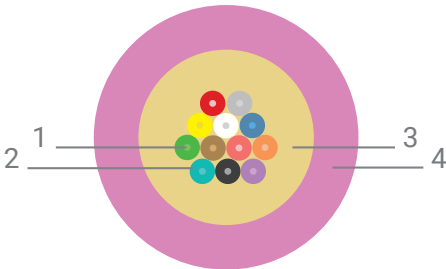

Properties

- Metal free indoor and outdoor cable
- Completely dry design
- For direct connector assembly
- High flexibility and light weight
- Halogen free and non-corrosive fire gases
- Low fire load for high safety requirements

Cable Construction

1	Fiber	SM or MM (250 μ)
2	Tight Buffer Tube	900μ LSZH
3	Strength Member	Aramid
4	Outer Jacket	LSZH

Identification

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value
Tensile Force	Installation	IEC 60794-1-21-E1	800 N
	In Service		500 N
Crush Resistance	Installation	IEC 60794-1-21-E3	1000 N / 10 cm
Impact	-	IEC 60794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts
Repeated Bending	-	IEC 60794-1-21-E6	R= 20 x D, 25 cycles, 40 N
Torsion	-	IEC 60794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N
Cable Bending	-	IEC 60794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	Eca

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
41201141	004F-IT-VT9(ZN-AY)H-4U090-4x1-...-Eca-0.8kN 4.6	4	4	0.9	4.6	16
41201142	006F-IT-VT9(ZN-AY)H-6U090-6x1-...-Eca-0.8kN 5.2	6	6	0.9	5.2	20
41201143	008F-IT-VT9(ZN-AY)H-8U090-8x1-...-Eca-0.8kN 5.8	8	8	0.9	5.8	31
41201144	012F-IT-VT9(ZN-AY)H-12U090-12x1-...-Eca-0.8kN 6.5	12	12	0.9	6.5	42
41201149	024F-IT-VT9(ZN-AY)H-24U090-24x1-...-Eca-0.8kN 8.0	24	24	0.9	8.0	55

* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 024F-IT-VT9(ZN-AY)H-24U090-24x1-A2-YE-Eca-0.8kN 8.0



Optical Fiber Characteristics and Physical Properties

Fiber Type	Wavelength	SM	OM1	OM2	OM3	OM4
Jacket Color	-	Yellow	Orange	Orange	Aqua	Violet
Core Diameter (µm)	-	9.0 ±0.5	62.5 ±2.5	50 ±2.5	50 ±2.5	50 ±2.5
Cladding Diameter (µm)	-	125 ±5.0	125 ±5.0	125 ±5.0	125 ±5.0	125 ±5.0
Primary Coating Diameter (µm)	-	245 ±10	245 ±10	245 ±10	245 ±10	245 ±10
Attenuation (max. in cable) (dB/km)	@1310 nm	≤ 0.35	-	-	-	-
	@1550 nm	≤ 0.25	-	-	-	-
	@850 nm	-	≤ 3.5	≤ 3.5	≤ 3.0	≤ 3.0
	@1300 nm	-	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5
Bandwitdh (overfilled)	@850 nm	-	200 Mhz*km	500 Mhz*km	1500 Mhz*km	3500 Mhz*km
	@1300 nm	-	500 Mhz*km	500 Mhz*km	500 Mhz*km	500 Mhz*km
Serial Ethernet 1 Gigabit	@850 nm	-	-	-	1000 meters	1040 meters
	@1300 nm	-	-	-	600 meters	600 meters
Serial Ethernet 10 Gigabit	@850 nm	-	-	-	300 meters	550 meters
	@1300 nm	-	-	-	300 meters	300 meters

Indoor Drop Fiber Cable

Design Type I-B4(ZN-AY)H

Standards: XP C93-850-2-22 / IEC 60794-1 / IEC 60794-2 / IEC 60793-1

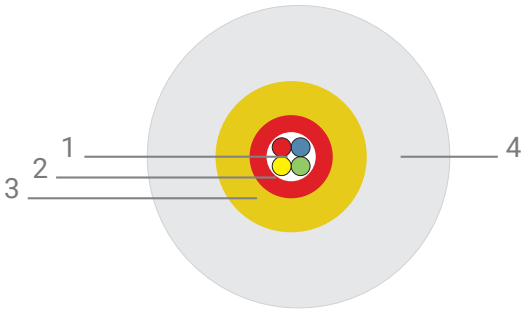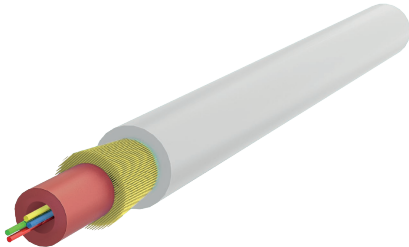

Properties

Metal free indoor cable with completely dry design
Designed for direct connector assembly
High flexibility and light weight
Halogen free and non-corrosive fire gases
LSZH flame retardant and self-extinguishing jacket material

Cable Construction

1	Fiber	SM or MM (250 μ)
2	Buffer Tube	LSZH - Semi-tight
3	Strength Member	Aramid yarn
4	Outer Jacket	LSZH - FR

Identification

Print Color/Method	Black / Ink-Jet	(length marking 1 m intervals)
Identification	Fiber Coloring according to coloring code ANSI/TIA-598, Jacket coloring according to SAMM color code standards	
Cable Printing	<Item Code> SAMM <Design Type> <Fiber Count> <Fiber Type> <WO-Batch No.> <CPR Class> <Meter Marking>	

Mechanical Properties

Test	Conditions	Test Standard	Specified Value
Tensile Force	Installation	NF EN IEC &0794-1-21-E1	200 N
Crush Resistance	Installation	NF EN IEC &0794-1-21-E3	500 N / 100 mm
Impact	-	NF EN IEC &0794-1-21-E4	Wp=1J, R:12.5cm, 3 impacts
Repeated Bending	-	NF EN IEC &0794-1-21-E6	R= 20 x D, 25 cycles, 40 N
Torsion	-	NF EN IEC &0794-1-21-E7	L= 125 x D, ±180°, 10 cycles, 20 N
Cable Bending	-	NF EN IEC &0794-1-21-E11A	R= 20 x D, 6 turns, 10 cycles

Environmental Properties

Property	Conditions	Test Standard	Result / Value
Temperature Range	Installation	EN IEC 60794-1-22-F12	-5 to +50 °C
	In Service		-25 to +60 °C
	Storage		-40 to +60 °C
Fire Propagation	Vertical single cable	IEC 60332-1-2	passed
Smoke Density	-	IEC 61034-2	passed
Halogen Acid Gas	Jacket material	IEC 60754-1	passed
Degree of Acidity	Jacket material	IEC 60754-2	passed
2011/65/EC (RoHS)	-	-	compliant
(EU) No 305/2011 (CPR)	-	EN 50575	Dca-s1a, d0, a1

Ordering Codes

Design Number	Order Code	Fiber Count	Sub Unit Count	Sub-Unit Diameter (mm) nom.	Cable Diameter (mm) nom.	Cable Weight (Kg/Km) nom.
10901154	001F-I-B4(ZN-AY)H-1B090-1x1-...-Dca-0.2kN 4.0	1	1	0.9	4.0 ±0.1	18
10901155	002F-I-B4(ZN-AY)H-1B105-1x2-...-Dca-0.2kN 4.0	2	1	1.05	4.0 ±0.1	18
10901156	004F-I-B4(ZN-AY)H-1B110-1x4-...-Dca-0.2kN 4.0	4	1	1.10	4.0 ±0.1	18

* Available fiber types are G657.A1, G657.A2, G651.OM2, G651.OM3, G651.OM4

* Sample Code: 004F-I-B4(ZN-AY)H-1B110-1x4-A2-WH-Dca-0.2kN



telecom.samm.com/create-account

Create an account to receive our
news, updates and discounts.

SAMM Teknoloji İletişim San. ve Tic. A.Ş.



TURKIYE

Company

SAMM Teknoloji İletişim San. ve Tic. A.Ş.

Address

GOSB İhsandede Cd. 800. Sok No: 802,
41400 Gebze-Kocaeli, Türkiye

Telephone

+90 444 1 726 / +90 (262) 677 16 80
(Fax) +90 (262) 677 16 81

Email

info@samm.com



GERMANY

Company

SAMM GmbH

Address

Niederstraße 18
40789 Monheim

Email

de@samm.com

Telecom Group

Website

telecom.samm.com

Email

telecom@samm.com



Our Website

