


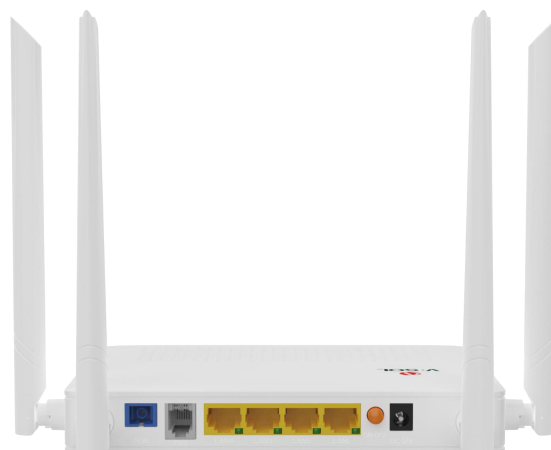

HG325DAC With FEM

1*XPON+1GE(WAN/LAN1)+3GE(LAN)+1POTS+Wi-Fi 5 HGU ONT

Key Features:

- XPON Dual Mode
- Plug and play, auto-detecting, auto-configuration
- 802.11n/ac dual band Wi-Fi, WIFI-FEM module
- Support full management of HGU devices
- Support guaranteed QoS
- Support IPv4/IPv6


Introduction:

HG325DAC (1GE(WAN/LAN1)+3GE(LAN)+1POTS+Wi-Fi 5 XPON HGU ONT) is a broadband access device specially designed to meet the needs of fixed network operators for FTTH and triple play services.

The ONT is based on high-performance chip solutions, supports XPON dual-mode technology (EPON and GPON), and also supports IEEE802.11b/g/n/ac Wi-Fi 5 technology and other Layer 2/Layer 3 functions, providing data service for carrier-grade FTTH applications. This ONU has a FEM module, which can improve the transmission power and reception sensitivity of WIFI, making the coverage of WIFI larger. In addition, the ONT also supports the OAM/OMCI protocol, and we can configure or manage various services of the ONT on the VSOL OLT.

The ONT has high reliability, is easy to manage and maintain, and has QoS guarantees for various services. It conforms to a series of international technical standards such as IEEE802.3ah and ITU-T G.984.

Application Chart:

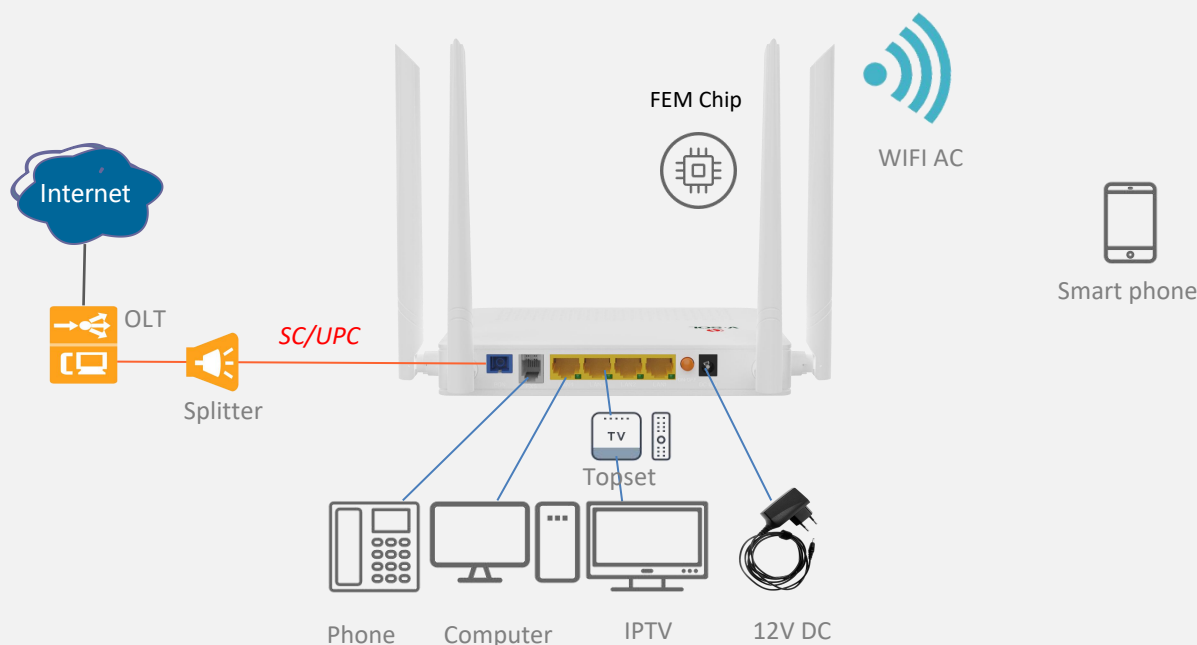

○ Hardware Parameter

Dimension	178mm×120mm×30mm(L×W×H)
Net weight	0.3KG
Operating condition	• Operating temp: -10°C~+55°C • Operating humidity:5%~95% (non-condensing)
Storing condition	• Storing temp: -40°C~+70°C • Storing humidity: 5%~95% (non-condensing)
Power adapter	DC 12V/1.5A
Power supply	12W
Interface	1GE(WAN/LAN1)+3GE(LAN)+1POTS+Wi-Fi 5
LED Indicators	PWR, LOS, PON, 2.4G, 5G, PHONE

○ Interface Parameter

PON interface	• 1XPON port(EPON PX20+ & GPON Class B+) • SC single mode, SC/UPC connector • TX optical power: 0~+4dBm • RX sensitivity: -27dBm • Overload optical power: -3dBm(EPON) or -8dBm(GPON) • Transmission distance: 20KM • Wavelength: TX 1310nm, RX1490nm
WIFI interface	• Compliant with IEEE802.11b/g/n/ac • 2.4GHz: 2.4000-2.4835GHz; 5.0GHz: 5.150-5.825GHz • WiFi:2.4GHz 2×2, 5GHz 2×2, rate up to 1.167Gbps,Multiple SSID • TX power: 2.4GHz: 23dBm; 5GHz: 27dBm • RX power: 2.4GHz: HT40-MCS7 -72dBm, 5GHz: VHT80 MCS9 <-63dBm
LAN interface	• 4*GE, Auto-negotiation RJ45 connectors • LAN1 supports WAN mode
Pots interface	1*FXS, RJ11 connector

○ Function Data

O&M	• OAM/OMCI, Telnet, WEB, TR069 • Support full management of HGU functions by VSOL OLT
Connect Mode	Support bridge, router & bridge/router mixed mode
QoS	• Support 4 queues • Support SP, WRR, 802.1P and DSCP
Data Service Functions	• Full speed non-blocking switching • 2K MAC address table • 8 full range VLAN ID • Support VLAN tag, untag, transparent, trunk, translation mode • Integrated port monitoring, port mirroring, port rate limiting, port SLA, etc • Support auto polarity detection of Ethernet ports (AUTO MDIX) • Support IGMP v1/v2/v3 snooping/proxy and MLD v1/v2 snooping/proxy
Wireless	• Integrated 802.11b/g/n/ac • Authentication:WEP/WAP-PSK(TKIP)/WAP2-PSK(AES) • Modulation type:DSSS,CCK and OFDM • Encoding scheme:BPSK,QPSK,16QAM and 64QAM
VoIP	• SIP and IMS SIP • G.711a/G.711u/G.722/G.729 Codec • Echo cancellation,VAD/CNG,DTMF Relay • T.30/T.38 FAX • Caller Identification/Call Waiting/Call Forwarding/Call Transfer/Call Hold/3-way Conference • Line testing according to GR-909
L3	• IPv4, IPv6 and IPv4/IPv6 dual stack • DHCP/PPPOE/Static • Static route, DHCP Server • NAT/DMZ/DDNS/Virtual Server
Security	• Support Firewall • Support Mac filter Based on MAC or URL • Support ACL

Ordering Information:

Product Name	Product Description	Accessories
HG325DAC	1GE(WAN/LAN1)+3GE(LAN)+1POTS+Wi-Fi 5	AC-DC power adaptor: DC12V / 1.5A